



If a measurement isn't stated, you can eyeball the dimensions.
All holes are 1/8" except where noted as 1/4"

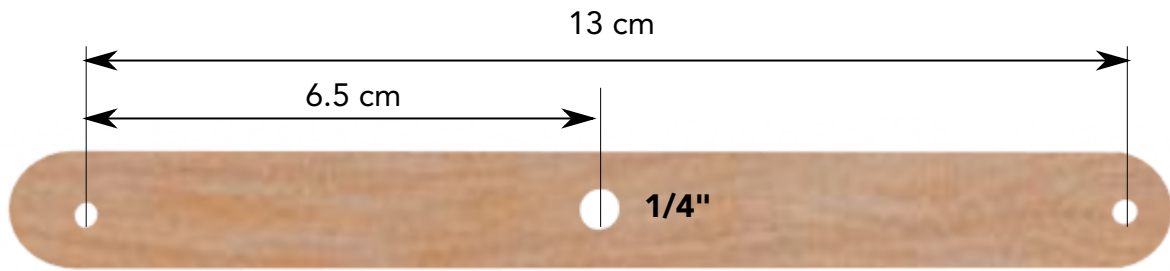


FRAME (x2)

use medium-sized (15 cm) popsicle sticks

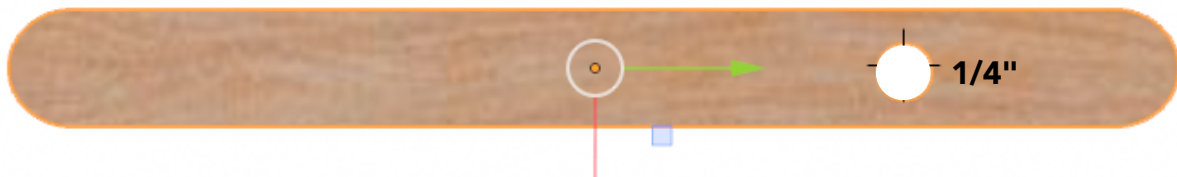


MOUNTING BRACKET

use medium-sized popsicle stick

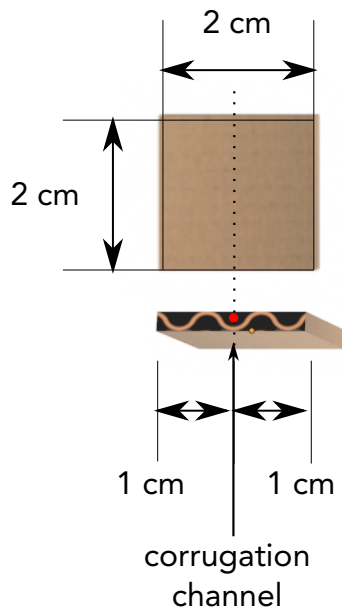

AXLE BEARING (x2)


A corrugation channel must lie at the midpoint of the bearing

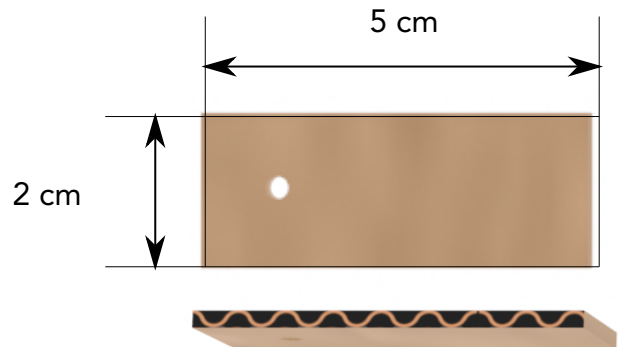

SPINDLE ARM (x2)


corrugations must run width-wise

STEERING PRECUT PARTS

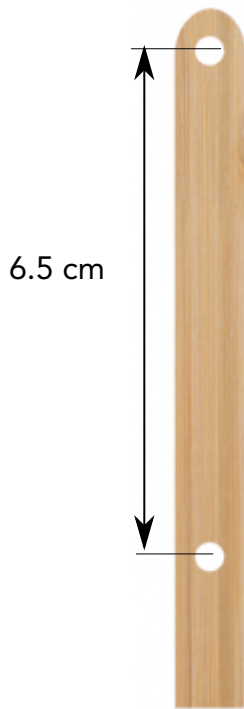


TIE ROD (x2)


use small (11 cm) popsicle sticks

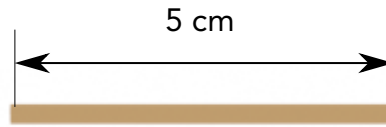

SPINDLE PIN (x2)




WHEEL AXLE (x2)



TIE ROD PIN (x2)




AXLE SPACER (x2)



STEERING ARM COLLAR



SPINDLE PIN CAPS (x4)



TIE ROD PIN CAPS (x2)